
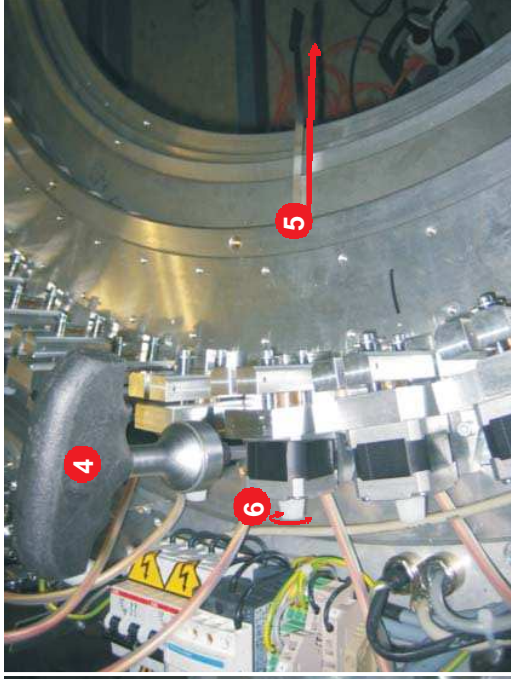


*PRO-CON actuators / mechanical installation*

*Utilizing a 0.1 mm feeler gauge as shown helps to find the exact position of each actuator and will prevent a mechanical blocking*

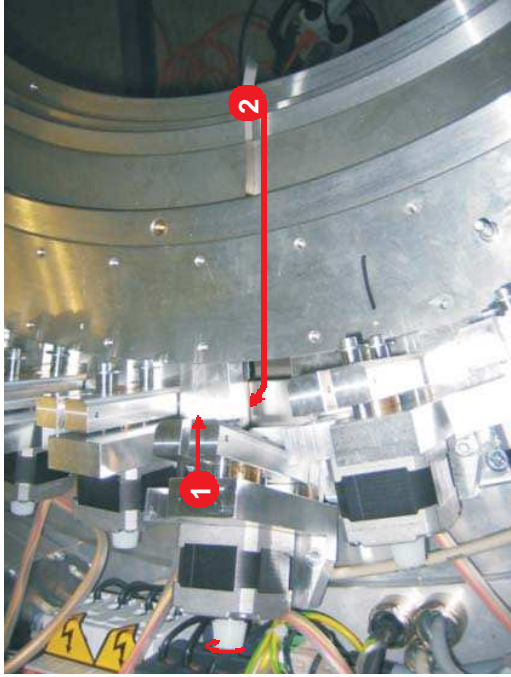

**1** Turn motor shaft clockwise to adjust the actuator to outer maximum position

**2** Use 0.1mm (3.9mil) feeler gauge on one flange

**3** Simultaneously push the actuator forward and towards the feeler gauge. Attach the fastening screw on the right hand side

**4** Attach fastening screw on the left hand side

**5** Remove the feeler gauge

**6** Turn motor shaft in both directions and check for smooth mechanical movement

